



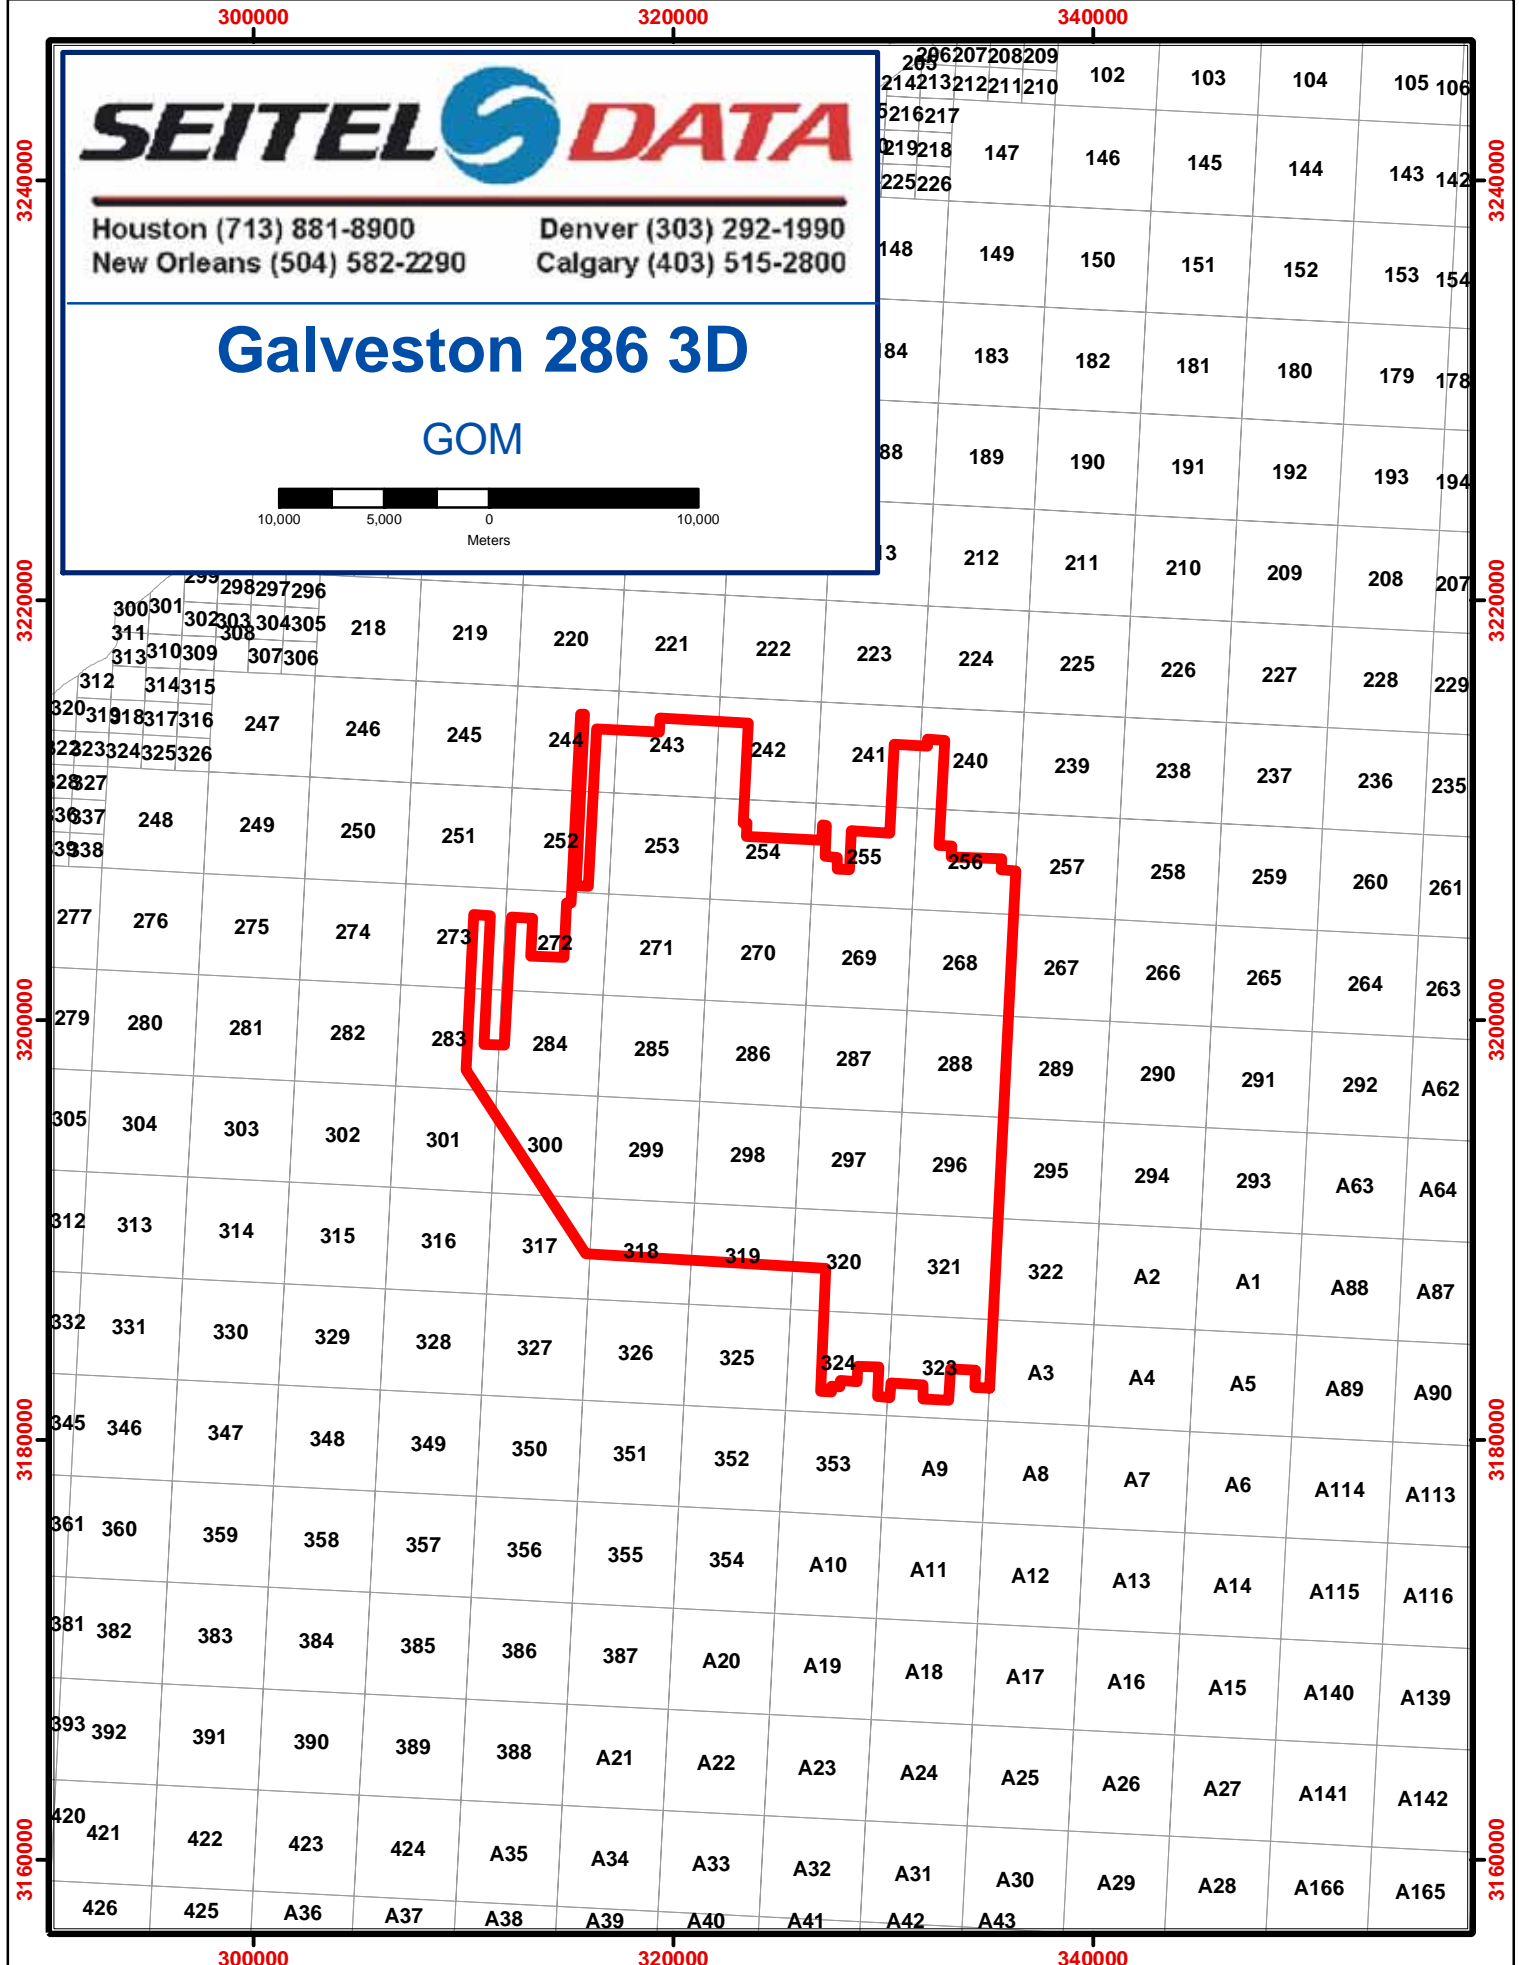

Houston (713) 881-8900 Denver (303) 292-1990
New Orleans (504) 582-2290 Calgary (403) 515-2800

Galveston 286 3D

GOM



Galveston 286 3D Survey

Acquisition Parameters

Date of Delivery	1994
Survey Size	23.757
Shooting Direction	N - S
Number of Streamers	3
Steamer Separation	160m
Streamer Length	4000m
Recording Groups	3 x 160
Source of Separation	80m
Shot Point Interval	50m
Acquired Bin Size	12.5m x 40m
Fold Coverage	40
Record Length	9s
Sample Rate	2m s

Generalized Processing Sequence

- 1) Reformat & Resample to 4 Milliseconds
- 2) Merge Navigation
- 3) Gain Delay-Time Compensation
- 4) Noise edit and Mute
- 5) 1 Gate 48 Milliseconds Gapped Deconvolution
- 6) Flexible Binning
- 7) Spatial Antialias Filter on Interpolated Common
- 8) 1 KM Grid Velocity Analysis
- 9) Full Kirchhoff Time Migration 14 KM Aperture, 8
- 10) 500 M Grid Velocity Analysis
- 11) NMO and Mute
- 12) 2 Gate Spiking Deconvolution
- 13) Stack
- 14) Interpolation to 12.5M x 20 M Bins
- 15) Filter
- 16) 3-D DMO Correction